


SPECIFICATIONS

- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000 VAC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55° C to +85° C

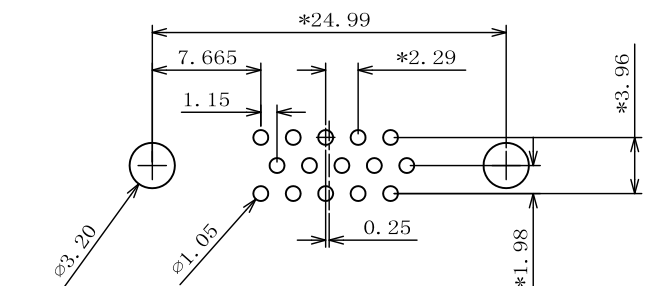

RECOMMENDED PCB LAYOUT THICKNESS=1.6mm

TOLERANCE: ± 0.05

2	SCREW	STEEL , Ni PLATING OVER ALL.	⑥
2	FISH FORK	SPCC, Tin PLATING OVER ALL.	⑤
1	COVER	HIGH TEMPERATURE PLASTIC UL94V-0	④
1	HOUSING	HIGH TEMPERATURE PLASTIC UL94V-0	③
15	CONTACT	COPPER ALLOY, GOLD FLASH PLATED ON CONTACT AREA TIN PLATING ON SOLDER AREA, Ni PLATING UNDER OVER ALL	②
1	SHELL	SPCC, Ni PLATING OVER ALL.	①
QTY'S	PART	SPECIFICATION	ITEM

版本 千川	變更內容 MODIFICATION	日期 DATE
00	新整理	2016.11.25

 東莞市千川电子有限公司
DONG GUAN QIAN CHUAN ELECTRONIC CO., LTD

公差 TOLERANCE	數量 QUANTITY	制圖 DRAWING	潘紅國	品名 TITLE	HDR3.08 15Pin母座 立式DIP 直鎖4.8螺絲 魚叉3.5mm H=9.80mm				
.X ± 0.30	單位 UNIT	審核 CHECKED	覃陸燕	料號 PART NO.	QHR9DA1-OSPL0P				
.XX ± 0.25	比例 SCALE	核准 APPROVE	李國亮	材質 MATERIAL	PBT	圖號 DRAW NO.	A048		
.XXX ± 0.20	圖幅 SIZE	角法 PROJ.		頁數 SHEET	1 OF 1	顏色 COLOR			
X° ± 2°									
X° ± --									